

# XNP-6120H

2M Full HD 12x Network PTZ Dome Camera




## Key Features

- Max. 2Megapixel (1920 x 1080) resolution
- 16:9 Full HD (1080p) resolution support
- 5.2 ~ 62.4mm (12x) optical zoom, 32x digital zoom
- H.265, H.264, MJPEG codec support, Multiple streaming
- Day & Night (ICR), WDR (150dB), Intelligent video analytics
- SD/SDHC/SDXC memory slot (Max.512GB)
- IP66, IK10, Bi-directional audio support

## Dimensions

Unit : mm (inch)

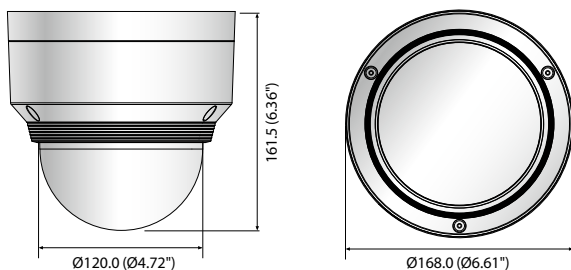

## Accessories (Optional)



## XNP-6120H

<b>VIDEO</b>	
Imaging Device	1/2.8" 2.16M CMOS
Total Pixels	1,945(H) x 1,109(V), 2.16M
Effective Pixels	1,945(H) x 1,097(V), 2.13M
Scanning System	Progressive
Min. Illumination	Color : 0.03 Lux (F1.6, 1/30sec), B/W : 0.003 Lux (F1.6, 1/30sec)
S / N Ratio	50dB
Video Out	CVBS : 1.0Vpp / 75Ω composite, 720 x 480(N), 720 x 576(P), for Installation USB : Micro USB Type B, 1280 x 720 for Installation
<b>LENS</b>	
Focal Length (Zoom Ratio)	5.2 ~ 62.4mm (Optical 12X)
Max. Aperture Ratio	F1.6 (Wide) ~ F3.0 (Tele)
Angular Field of View	H : 54.58° (Wide) ~ 5.30° (Tele) / V : 32.19° (Wide) ~ 3.00° (Tele)
Min. Object Distance	1.5m (4.92ft) (Wide), 2.1m (6.89ft) (Tele)
Focus Control	Auto / Manual / One shot AF
Lens / Mount Type	DC Auto Iris / Board-in Type
<b>PAN/TILT/ROTATE</b>	
Pan / Tilt Range	360° Endless / 190° (-5° ~ 185°)
Pan Speed	Preset : 350°/sec, Manual : 0.024°/sec ~ 200°/sec
Tilt Speed	Preset : 350°/sec, Manual : 0.024°/sec ~ 200°/sec
Sequence / Preset Accuracy	Preset (300 ea), Swing_Group (6 ea), Trace_Tour (1 ea), Auto Run, Schedule / ±0.2°
Azimuth	Yes (E / W / S / N / NE / NW / SE / SW)
Auto Tracking	Support
<b>OPERATIONAL</b>	
Camera Title	Off / On (Displayed up to 85 Characters) - W/W : English / Numeric / Special Characters - China : English / Numeric / Special / Chinese Characters - Common : Multi-line (Max. 5), Color (Grey / Green / Red / Blue / Black / White), Transparency, Auto scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / Schedule
Backlight Compensation	Off / BLC / HLC / WDR
Wide Dynamic Range	150dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNRV (2D + 3D Noise filter) (Off / On)
Digital Image Stabilization	Off / On (Built-in Gyro)
Defog	Auto / Manual / Off
Motion Detection	Off / On (8ea, Polygonal)
Privacy Masking	Off / On (24 Zones of Rectangle zone) - Color : Grey / Green / Red / Blue / Black / White - Zoom ratio option for mask mode - Mosaic option
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor (included Mercury & Sodium)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Digital Zoom	32x
Flip / Mirror	Off / On
Video & Audio Analytics	Tampering, Loitering, Directional Detection, Fog Detection, Virtual Line, Enter/Exit, (Dis) Appear, Audio Detection, Face Detection, Motion Detection Sound Classification
Serial Interface	RS-485 - Samsung-T/E, Pelco-D/P, Panasonic, Bosch, AD, GE, Vicon, Honeywell
Alarm I/O	Input 1ea / Output 1ea (Relay type)
Alarm Triggers	Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect
Alarm Events	File upload via FTP and E-Mail, Notification via E-Mail, TCP and HTTP, local storage (SD/SDHC/SDXC) or NAS recording at Alarm Triggers, External output, Preset
Pixel Counter	Support
<b>NETWORK</b>	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265 / H.264 (MPEG-4 part 10/AVC), Motion JPEG
Resolution	1920 x 1080, 1280 x 1024, 1280 x 960, 1280 x 720, 1024 x 768, 800 x 600, 800 x 448, 720 x 576, 720 x 480, 640 x 480, 640 x 360, 320 x 240
Max. Framerate	H.265 / H.264 : Max 60fps at all resolutions, Motion JPEG : Max. 30fps at all resolutions
Smart Codec	Manual mode (Area-Based : 5ea)
WiseStreamII	Support
Video Quality Adjustment	H.265 / H.264 / MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.265 / H.264 : CBR or VBR, Motion JPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio In	Selectable (Mic IN / Line IN) Supply voltage : 2.5VDC (4mA), Input impedance: approx. 2K Ohm
Audio Out	Line out (3.5mm mono jack), Max output level : 1 Vrms
Audio Compression Format	G.711 u-law / G.726 Selectable, G.726 (ADPCM) 8KHz, G.711 8KHz, G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps, AAC-LC : 48Kbps at 16KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTCP, RTPSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS (SSL) Login Authentication, Digest Login Authentication, IP Address Filtering, User access Log, 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	Micro SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording (1st slot to 2nd slot) - Motion images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS (Network Attached Storage), Local PC for Instant Recording
Application Programming Interface	ONVIF profile S/G, SUNAPI 2.0 (HTTP API), Wisenet Open Platform
Webpage Language	English, French, German, Spanish, Italian, Chinese, Russian, Japanese, Swedish, Portuguese, Turkish, Polish, Czech, Dutch, Hungary, Greek
Web Viewer	Supported OS : Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 - Supported Browser : Google Chrome, MS Edge, Mozilla Firefox (Window 64bit only), Apple Safari 10 (Mac OS X only) Plug-in Free Webviewer - Supported Browser : MS Explore 11, Apple Safari 10 (Mac OS X only)
Central Management Software	SmartViewer, SSM
<b>ENVIRONMENTAL</b>	
Operating Temperature / Humidity	-30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP66
Vandal Resistance	IK10
<b>ELECTRICAL</b>	
Input Voltage / Current	12V DC, PoE
Power Consumption	12W
<b>MECHANICAL</b>	
Color / Material	Ivory / Aluminum
Dimensions (WxH)	Ø168.0 x 161.5mm (Ø6.61" x 6.36")
Weight	1.9 kg (4.19 lb)

\* The latest product information / specification can be found at hanwha-security.com  
\* Design and specifications are subject to change without notice.